


Data Sheet


RBL-C Robust Chain Operated Roller Blind System

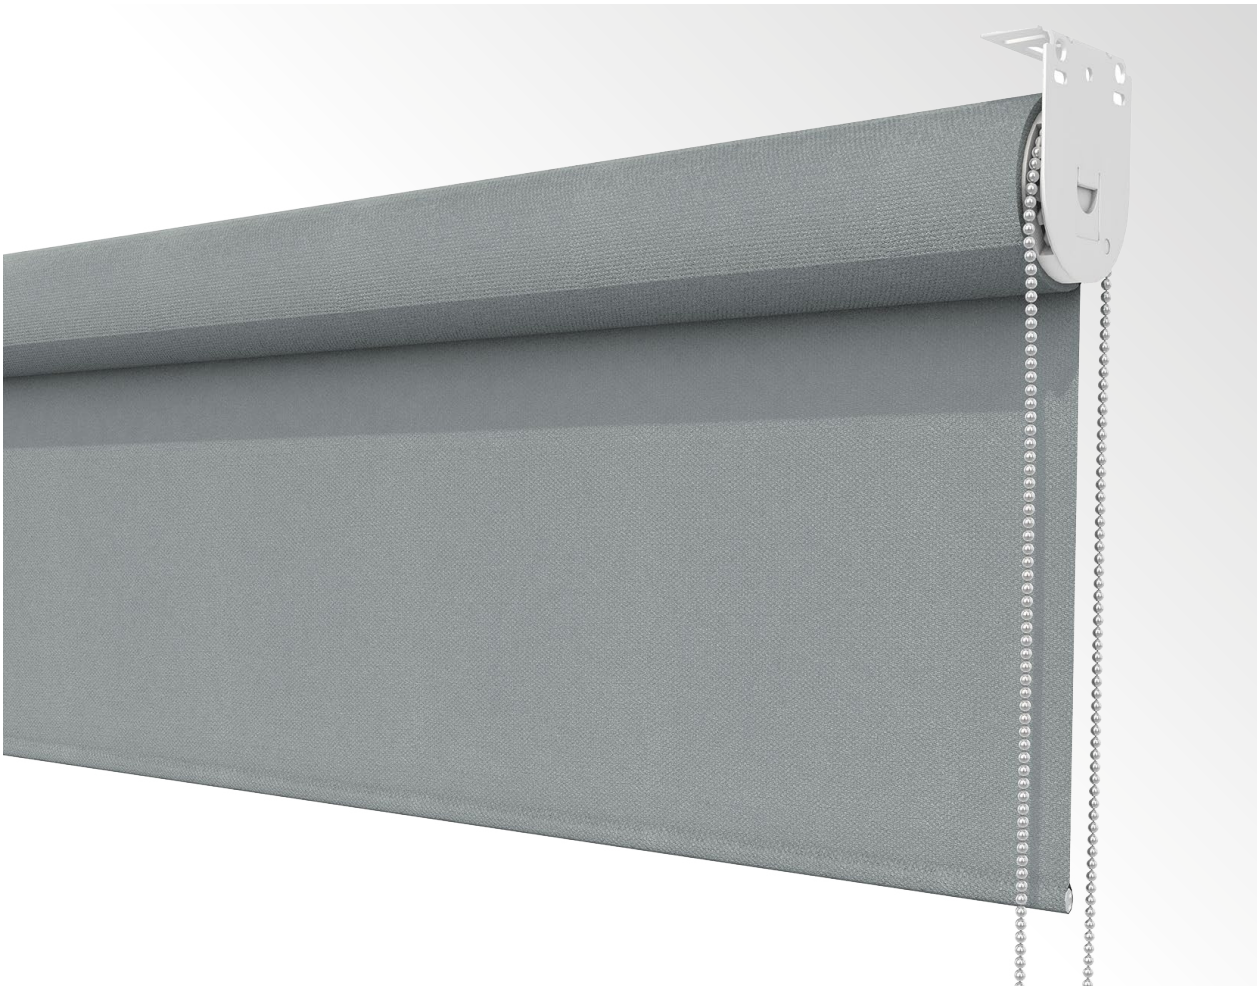

Features and Benefits


- Exceptionally quiet and smooth operation
- White (RAL 9016) or grey (RAL 9018) end sets and bracket covers
- Choice of white nylon or silver stainless steel control chain
- Heavy duty extruded aluminium rollers
- Brackets for fixing in any situation
- Minimal light gap is the same at both sides of the fabric
- Booster springs can be added to give feather-touch operation

Configuration

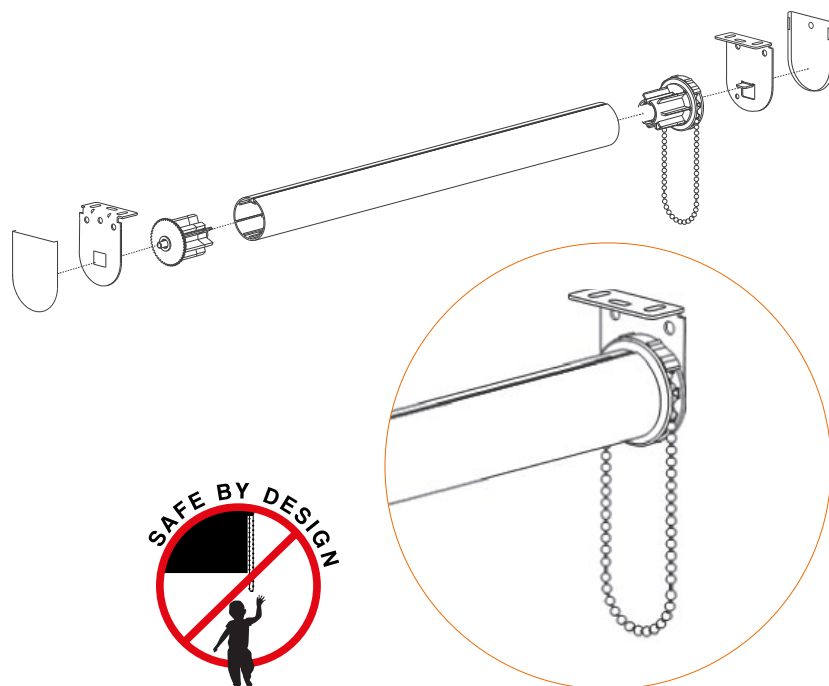


Fixing Brackets


Top Fix

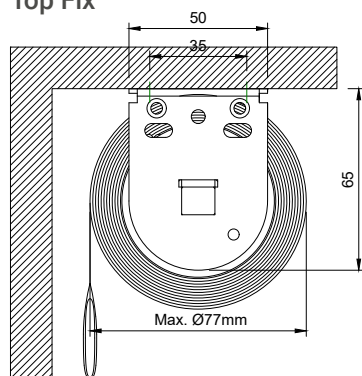

Face Fix


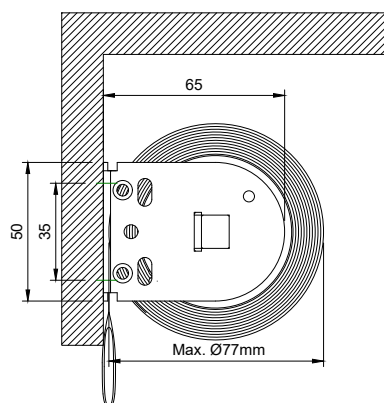


Recess Fix

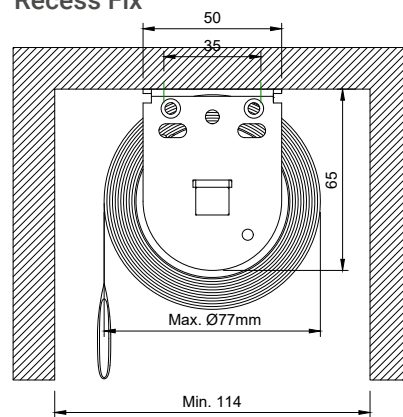



Mounting Rail

For use when fixing to plasterboard or weak substrates

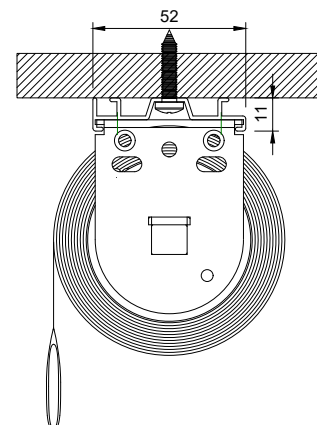


Ceiling Pocket

Available in 3m lengths. White powdercoat finish as standard

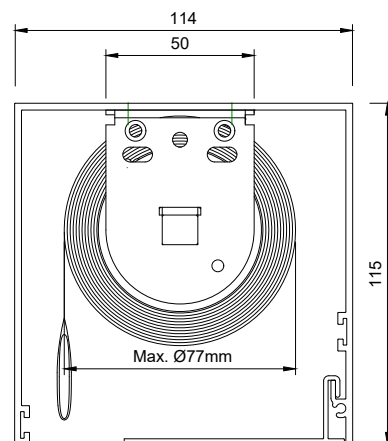


Bracket Options


In-line Bracket (Linked Blinds)

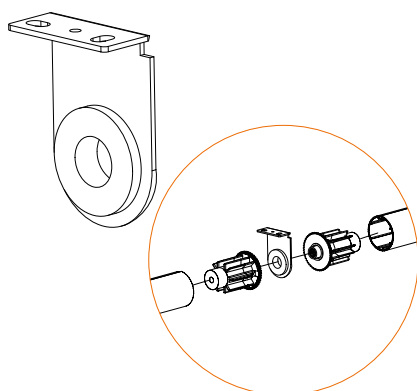

Angled Bracket (Linked Blinds)

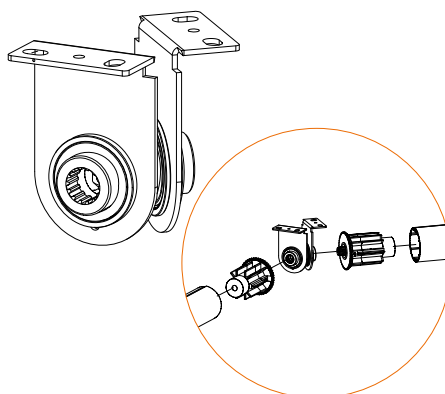


Combination Bracket

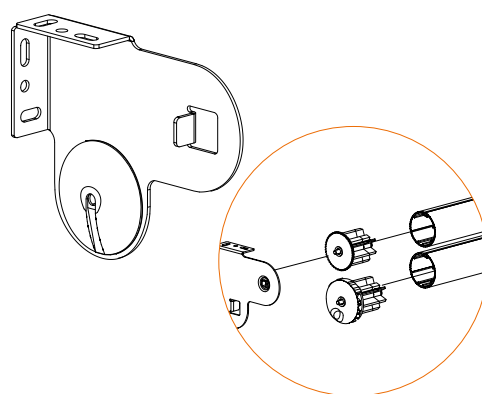

Guide Wires


Note - Not recommended for use with chain retainer

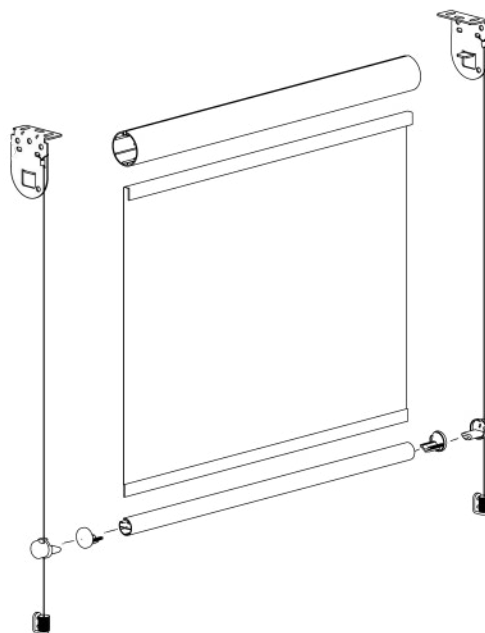


Size Parameters

Minimum width: 200mm
Maximum width: 3200mm
Maximum drop: 3600mm


Greater overall widths can be achieved by using linked blinds

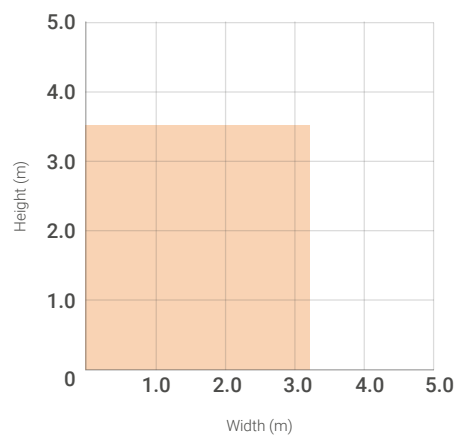


Bottom Bar Options




Round



Teardrop




Rectangular




Fabric Enclosed

Cassette



Square – Can Be Wall Or Face Fixed

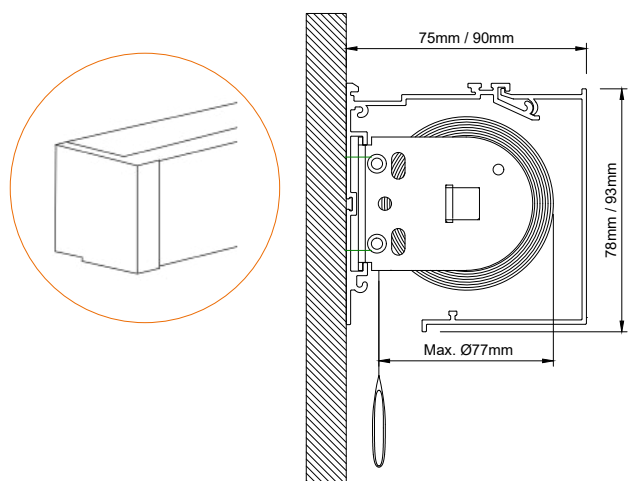

Round – Can Be Wall Or Face Fixed

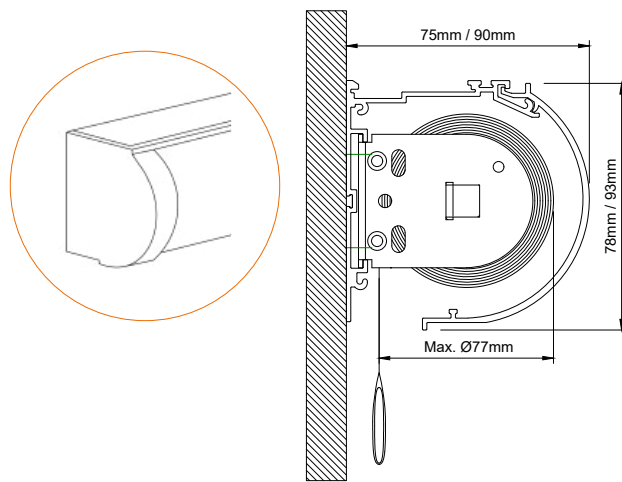


Fascia

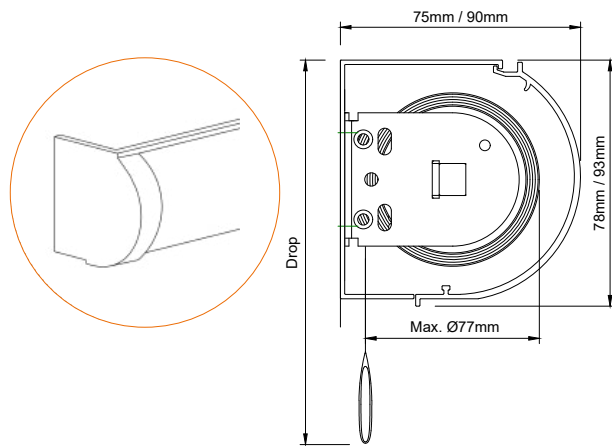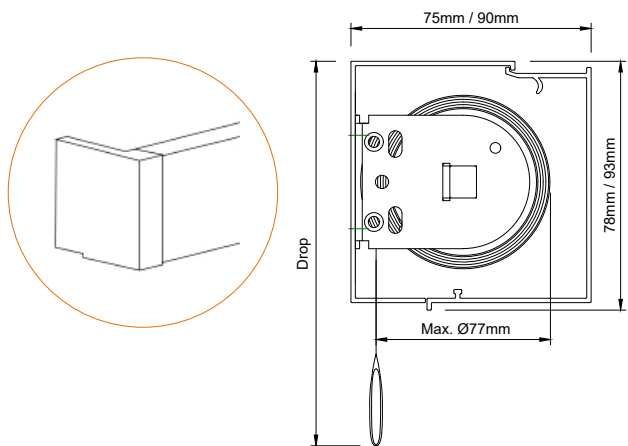



Light Gap

Single Blind

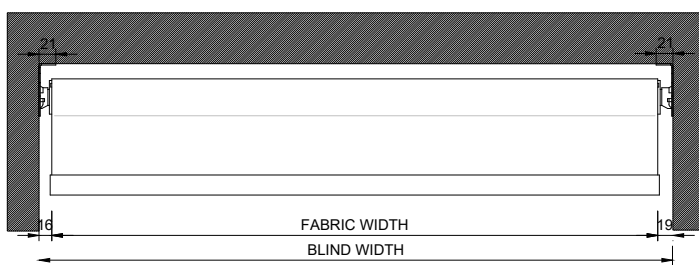

Linked Blinds

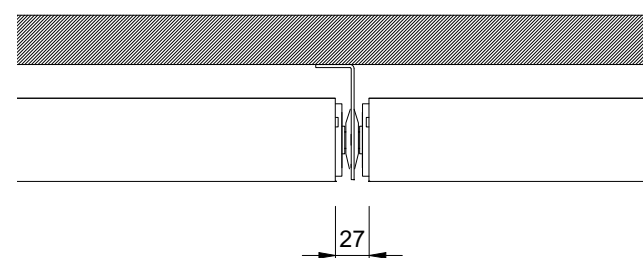

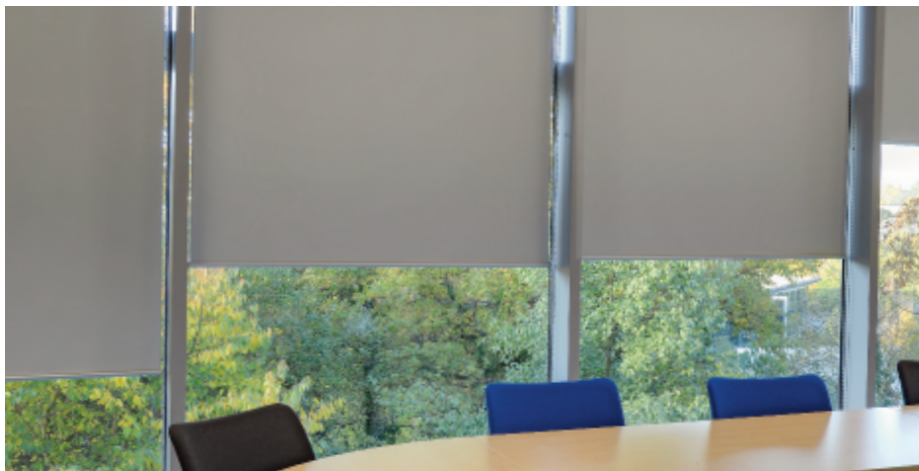


Fabric Choice

The entire ShadeTech fabric range is suitable for use with RBL roller blinds. Alternatively they can be manufactured using fabric selected by specifier or client.

Maintenance

RBL roller blinds are made from high quality materials. Cleaning regime depends on fabric specified. Most can be wiped clean with a damp cloth.

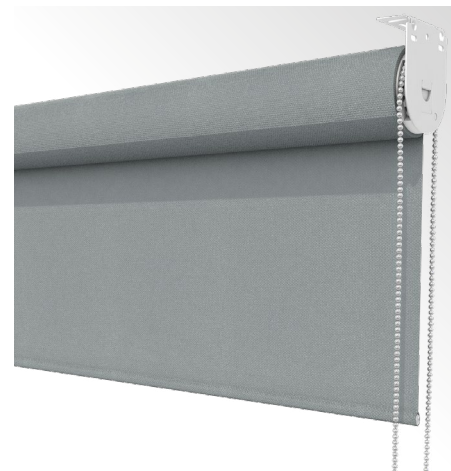

Quality and Guarantee

ShadeTech warrants to the end user that its products are free from defects in the material and workmanship for a period of five years for the mounting hardware.